

# Radio

Radio is one of the generic HTML Form input elements. In the Form Builder, one is able to define the options available to the Select Box via various means, including with the use of Options Binder.



Figure 1: Sample Radio in Form Builder

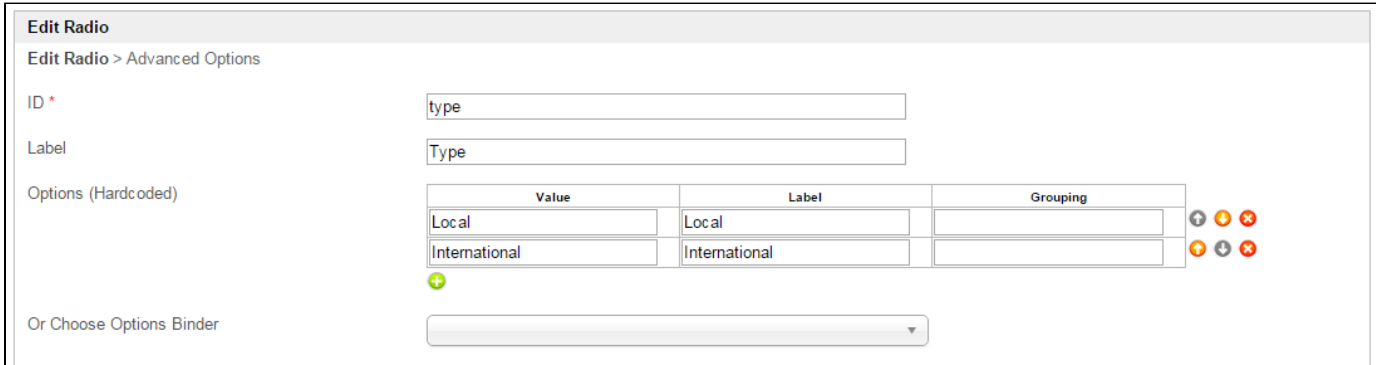


Figure 2: Radio Properties

Name	Description
ID	Element ID (By declaring as "type", a corresponding database table column "c_type" will be created)
Label	Element Label to be displayed to end user.
Options (Hardcoded)	Select Box options  Options defined here will not be put into use if Options Binder is defined below.
Or Choose Options Binder	Radio options to be populated using Options Binder plugin.

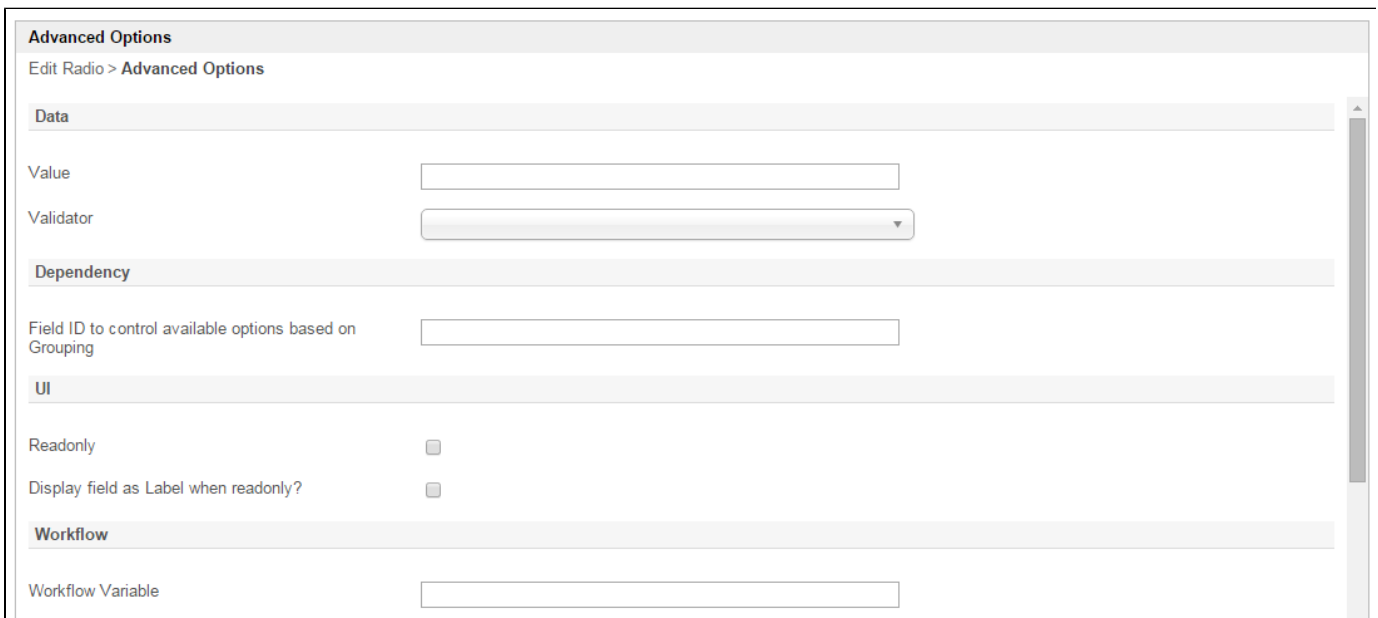


Figure 3: Radio Properties - Advanced Options

Name	Description
Value	<p>Default Value when there's no existing value found/selected.</p> <p>Hash variable is accepted here. For example, you may key the following</p> <div data-bbox="467 342 1443 443" style="border: 1px solid #ccc; padding: 5px; margin: 10px 0;"> <pre>#currentUser.firstName# #currentUser.lastName#</pre> </div> <p>to pre-populate the field with current logged in user's name.</p> <p>You may define multiple default options by separating them using semicolons.</p> <div data-bbox="467 554 1443 730" style="border: 1px solid #ccc; padding: 5px; margin: 10px 0;"> <div style="background-color: #f0f0f0; padding: 2px; margin-bottom: 5px;">Sample</div> <pre>option1;option2;option3</pre> </div>
Validator	<p>Attach a Validator plugin to validate the input value.</p> <div data-bbox="428 821 1482 913" style="border: 1px solid #ccc; padding: 5px; margin: 10px 0;"> <p>When will validation takes place? Validation will takes place whenever form is submitted except when it is submitted as "Save as Draft".</p> </div>
Field ID to control available options based on Grouping	<p>Dynamically change the available options based on the "grouping" attribute defined in the options by matching to the current value of the element ID defined.</p>
ReadOnly	<p>Determines if the element is editable.</p>
Display field as Label when readonly?	<p>Displays the value of the element as plain text when element is set to "ReadOnly".</p>
Workflow Variable	<p>If the form is part of a workflow process, upon saving of the form (by clicking on "Save as Draft" or "Complete" button). The value in this input field will be saved into the corresponding workflow variable named here.</p> <div data-bbox="428 1201 1482 1520" style="border: 1px solid #ccc; padding: 5px; margin: 10px 0;"> <p>Using a non-existent Workflow Variable name You will get the following warning with the name printed out (e.g. status) in the server log if you attempt to map to a non-existent Workflow Variable.</p> <div data-bbox="542 1320 1421 1451" style="border: 1px solid #ccc; padding: 5px; margin: 10px 0;"> <pre>context attribute status does not exist in process context - adding new attributes to the process context is not allowed</pre> </div> </div>