

Popup Select Box

Popup Select Box is an enhancement of the ordinary `SelectBox`. Instead of selecting from a generic drop-down list, the Popup Select Box allows you to select from a `DataList` instead.



Figure 1: Screenshot showing Popup Select Box in Form Builder



Figure 2: Screenshot showing Popup Select Box in actual Form

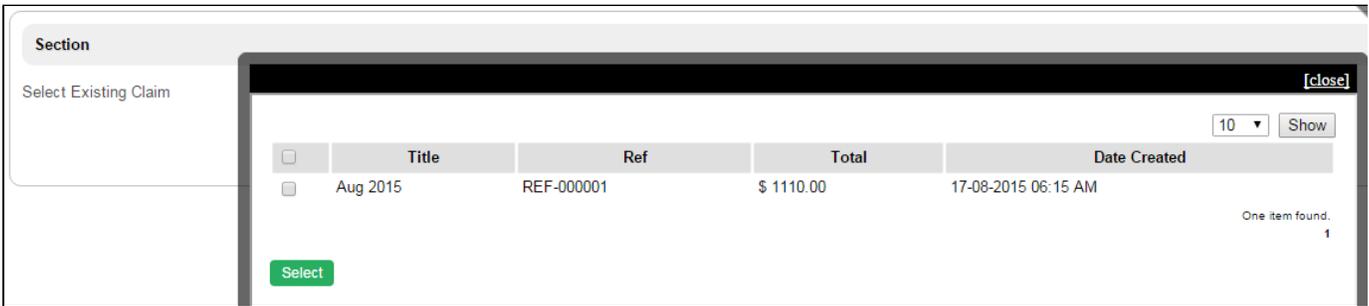


Figure 3: Screenshot showing Popup Select Box in actual Form - Performing selection



Figure 4: Popup Select Box Properties

Name	Description
ID	Element ID (By declaring as "appeal_claim", a corresponding database table column "c_appeal_claim" will be created)
Label	Element Label to be displayed to end user.
Data List	Data List to display for selection.
Display Field	Field ID from the target Data List for eventual selected option label.

Advanced Options

Edit Popup Select Box > **Advanced Options**

Data

Default Value
Separate value with (:) if multiple values need to be set.

ID Field

Multiple Selection

URL Request Parameters for Datalist

Parameter	Field Id	Default Value
+		

Validator

UI

Readonly

Display field as Label when readonly?

Select Button Label *

Popup Dialog Height

Popup Dialog Width

Workflow

Workflow Variable

Figure 5: Popup Select Box Properties - Advanced Options

Name	Description
Default Value	<p>Default Value when there's no existing value found/selected.</p> <p>Hash variable is accepted here. For example, you may key the following</p> <div style="border: 1px solid gray; padding: 5px; margin: 5px 0;"> <pre>#currentUser.firstName# #currentUser.lastName#</pre> </div> <p>to pre-populate the field with current logged in user's name.</p> <p>You may define multiple default options by separating them using semicolons.</p> <div style="border: 1px solid gray; padding: 5px; margin: 5px 0;"> <div style="background-color: #f0f0f0; padding: 2px; display: inline-block;">Sample</div> option1;option2;option3 </div>
ID Field	<p>Target Data List's column ID value to be saved as option value.</p> <p>Default: id</p>
Multiple Selection	<p>Toggle Multiple Selection.</p>

<p>URL Request Parameters for Datalist</p>	<p>Refine the target Data List selections by defining the filter criteria here.</p> <table border="1" data-bbox="354 184 740 380"> <thead> <tr> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>Parameter</td> <td>Target Data List filter parameter name</td> </tr> <tr> <td>Field ID</td> <td>Current form element field ID</td> </tr> <tr> <td>Default Value</td> <td>Default Value for the search parameter</td> </tr> </tbody> </table>	Name	Description	Parameter	Target Data List filter parameter name	Field ID	Current form element field ID	Default Value	Default Value for the search parameter
Name	Description								
Parameter	Target Data List filter parameter name								
Field ID	Current form element field ID								
Default Value	Default Value for the search parameter								
<p>Validator</p>	<p>Attach a Validator plugin to validate the input value.</p> <div data-bbox="354 468 1484 562" style="border: 1px solid #ccc; padding: 5px;"> <p>When will validation takes place? Validation will takes place whenever form is submitted except when it is submitted as "Save as Draft".</p> </div>								
<p>ReadOnly</p>	<p>Determines if the element is editable.</p>								
<p>Display field as Label when readonly?</p>	<p>Displays the value of the element as plain text when element is set to "ReadOnly".</p>								
<p>Select Button Label</p>	<p>Select Button Label</p>								
<p>Popup Dialog Height</p>	<p>Height in character</p> <div data-bbox="394 823 1443 999" style="border: 1px solid #ccc; padding: 10px;"> <div style="background-color: #f0f0f0; padding: 5px; text-align: center;">Sample</div> <p>500px</p> </div>								
<p>Popup Dialog Width</p>	<p>Width in character</p> <div data-bbox="394 1087 1443 1264" style="border: 1px solid #ccc; padding: 10px;"> <div style="background-color: #f0f0f0; padding: 5px; text-align: center;">Sample</div> <p>90%</p> </div>								
<p>Workflow Variable</p>	<p>If the form is part of a workflow process, upon saving of the form (by clicking on "Save as Draft" or "Complete" button). The value in this input field will be saved into the corresponding workflow variable named here.</p> <div data-bbox="354 1379 1484 1642" style="border: 1px solid #ccc; padding: 10px;"> <p>Using a non-existent Workflow Variable name You will get the following warning with the name printed out (e.g. status) in the server log if you attempt to map to a non-existent Workflow Variable.</p> <div data-bbox="467 1472 1422 1575" style="border: 1px solid #ccc; padding: 5px; text-align: center;"> <p>context attribute status does not exist in process context - adding new attributes to the process context is not allowed</p> </div> </div>								