

# Userview Key

Userview Key serves as a placeholder for a common value to be used by its elements (i.e. Userview Menu).

The usage of the Userview Key is dependent on the implementation of the element such as Userview Menu.

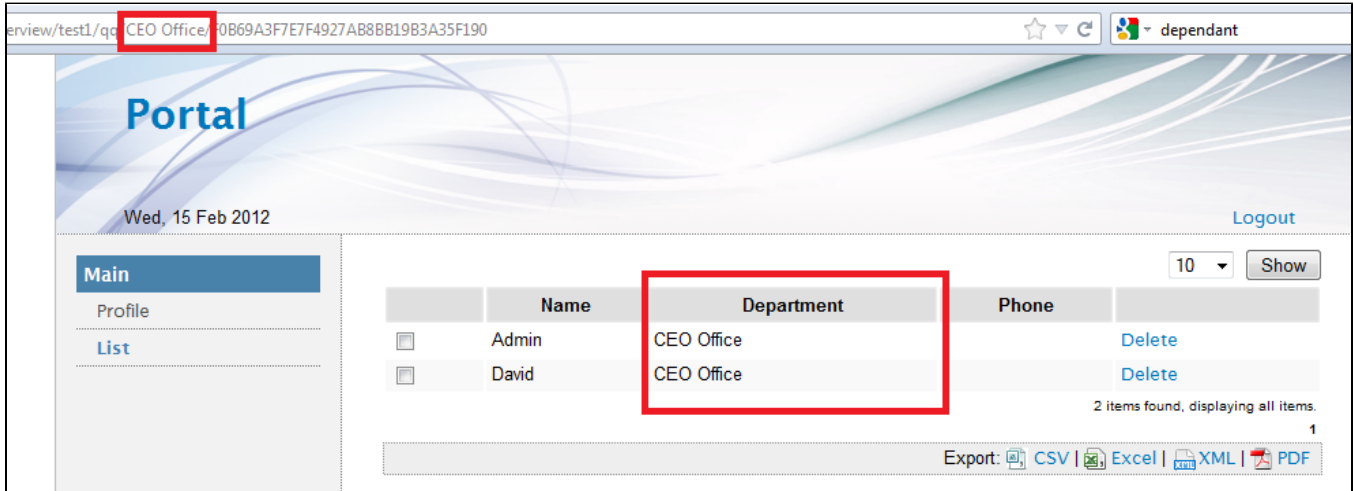


Figure 1: Example of Userview Key Usage to Pre-filter a Listing Based on a Column

## Usage of Userview Key

Userview Key is most commonly used when you need to restrict the content of your userview to a certain category/attribute in your application.

Example:

- Userview Key can be a **department id** whereby all the content inside the Userview (record listing) would be based on the **specific department**.
- Userview Key can be a **category id** in a support ticket system whereby all the content in the Userview (ticket listing, add new ticket) will be of the **specific category**.

## How to Set the Userview Key

The userview key is placed right before the element custom ID.

Example: <http://localhost:8080/jw/web/userview/profileApp/profileUserview/CEO Office/profile>

Link structure: userview/[App ID]/[Userview ID]/[Userview key]/[Element Custom ID]

Elements with such usage

- [Run Process Userview Element](#)
- [Userview Form Element](#)
- [Userview List Element](#)
  
- [Form Data Binder](#)
- [JDBC Datalist Binder \(Custom SQL Queries\)](#)
- [SQL Chart Userview Menu](#)