

Internationalization Hash Variable

To support language localization on application level.

Prefix

i18n

Attributes

- #i18n.*keyName*#

Sample Attributes


#i18n.app.hello#

Scope of use

- All components within the App.

Sample Usage

In your App's properties, you may add your own messages. For example, we can have two messages in Chinese and English for the key "app.hello".

 **joget** WORKFLOW Enterprise

1 Forms & UI

2 Processes

3 Properties & Export

All Apps

HomeWelcome Page

1 Setup UsersSetup Organization & Users

2 Design AppsWorkflow, Forms, etc

3 Run AppsRun Apps

Add Environment Variable

Add Message

Set Plugin Default Properties

Export

Environment Variable

Message

Plugin Default Properties

Filter By Locale

Search

<input type="checkbox"/>	Key	Locale	Message
<input type="checkbox"/>	app.hello	en_US	Hello
<input type="checkbox"/>	app.hello	zh_CN	欢迎

Figure 1: Listing of messages in your app's properties

In your Userview, you may access the value by using this internationalization hash variable, #i18n.app.hello#. You may also use this hash variable in places such as plugin properties, form builder, and datalist builder.

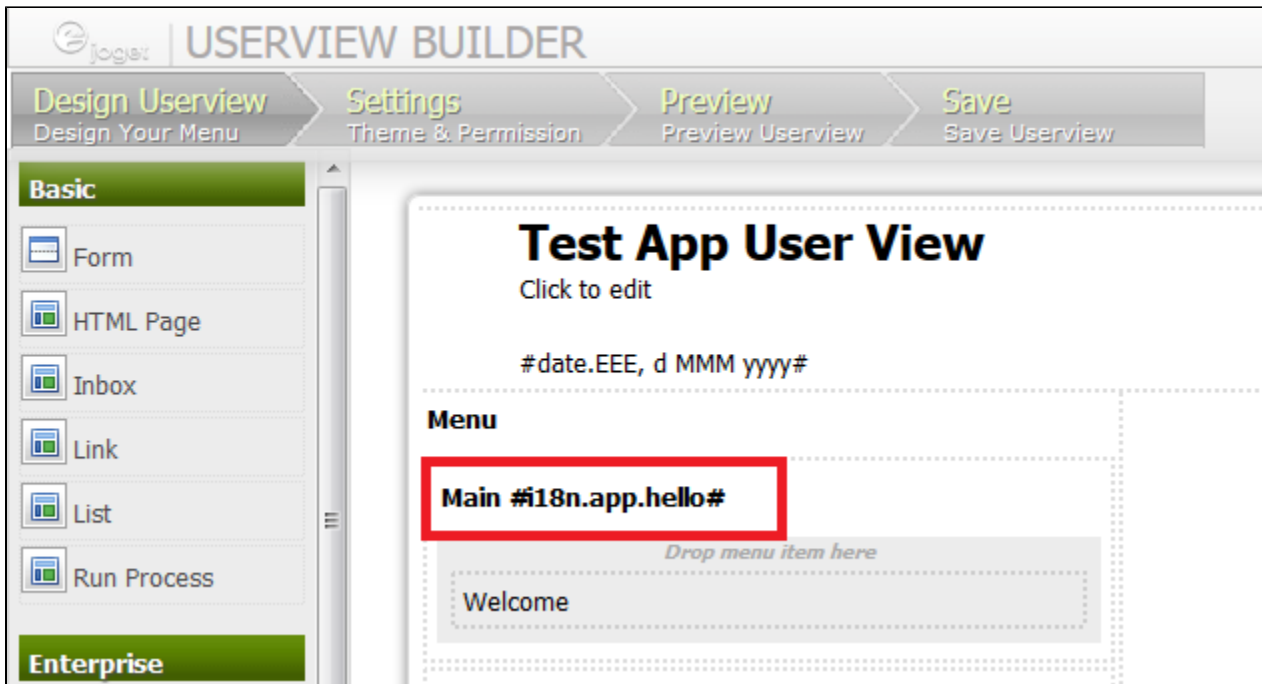


Figure 2: Using Internationalization hash variable in the Userview Builder.

Depending on the choice of locale the user is in, the message will be displayed accordingly.



Figure 3: Preview of Hash Variable in Userview